

ProLED linear

Everyone loves simplicity. That is exactly what you get when ordering this linear design. All accessories are included, and the ease of installation make it the right choice for your project.

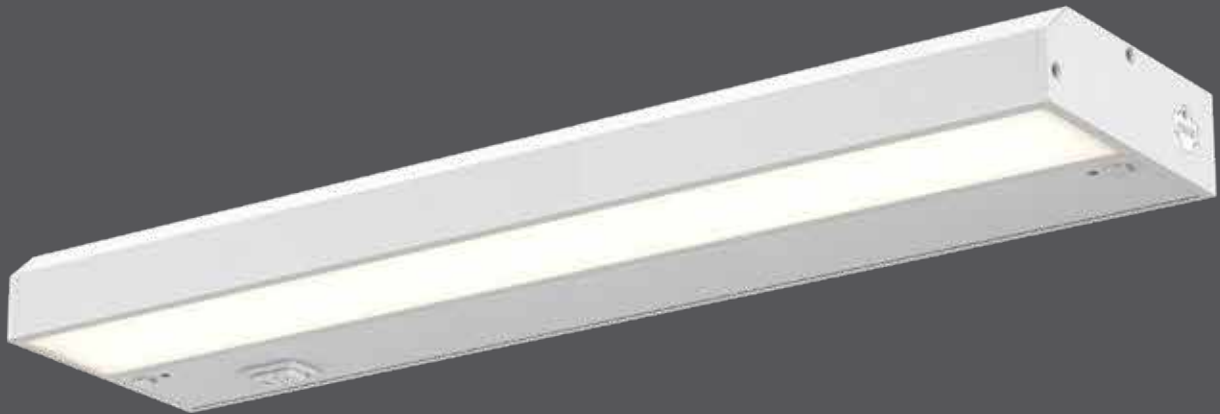

| Model | Size | Watts | Delivered lumens | LED lumens | CRI | Color °T | Voltage |
|-----------------|------|-------|------------------|------------|-----|----------|---------|
| HLF09-3K | 9" | 3 W | 200 lm | 250 lm | 90 | 3000 K | 120 V |
| HLF12-3K | 12" | 4 W | 380 lm | 450 lm | 90 | 3000 K | 120 V |
| HLF18-3K | 18" | 8 W | 675 lm | 750 lm | 90 | 3000 K | 120 V |
| HLF24-3K | 24" | 12 W | 900 lm | 1000 lm | 90 | 3000 K | 120 V |
| HLF30-3K | 30" | 16 W | 1100 lm | 1200 lm | 90 | 3000 K | 120 V |

Specifications

120 V direct connection or plug-in
 Dimmable with regular low-voltage electronic dimmers
 Over 50,000 hours of service life
 Interconnectable
 Very low profile
 Robust construction

Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

Finish

○ **WH** White


Accessories

9000-ACCE24
 24" extension cord
9000-ACCE72
 72" extension cord


Order example

HLF18-3K-WH
 18" undercabinet fixed hardwire linear with 675 lumens at 3000K in a white finish


HLF09




HLF12



HLF18



HLF24

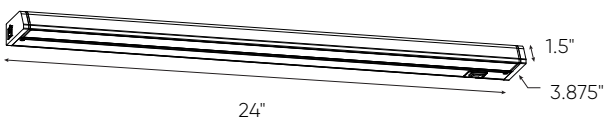

HLF30

